

UV Enhanced Photodiode

OSD1-UT



Description

The OSD1-UT is high-output, high sensitivity silicon UV Photodiode mounted in TO-18 metal can package with flat K9 glass window, permits wide angular response.

Features


- * High speed response
- * Wide angular response
- * High reliability in demanding environments
- * Operating temperature is from -40 to +80°C
- * Storage temperature is from -40 to +100°C
- * soldering temperature is 260°C @Max.5 seconds at the position of 2mm from the PIN legs.

General Ratings

- * Type UV Silicon Photodiode
- * High linearity
- * Chip active area: 1.0mm*1.0mm
- * Low dark current

Applications

- * Analytical instruments
- * Precision photometry
- * Fluorescence analyzer
- * Pollution monitor
- * Water analyzer
- * Medical equipment
- * UV exposure meters

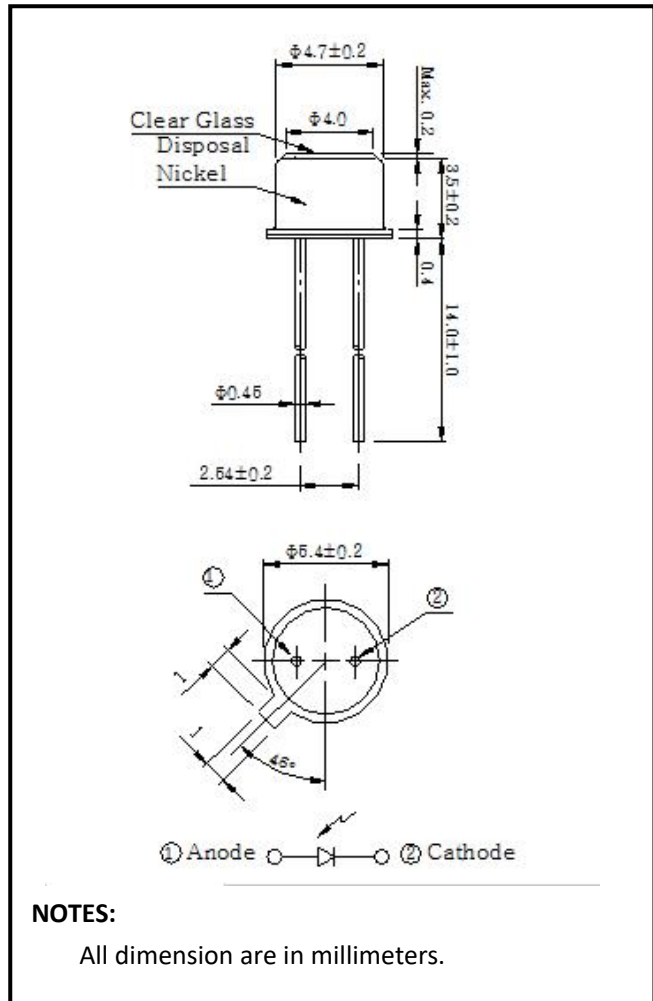


Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject change without notice

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Short circuit Current	I _{SC}	Ev=100lx fc=2856k*		14		μA
Isc Temperature Coefficient	TC I _{sc}	2856k		1.1		%/°C
Open Circuit Voltage	V _{oc}	Ev=100lx fc=2856k*		360		mV
Voc Temperature Coefficient	TC Voc	2856k		-2.2		mV/°C
Dark current	I _d	VR=10mV		30		pA
		VR=10V		480		
Rise time	t _r	V _R =5V;λ=375nm;R _L =50Ω		1.5		ns
Temp coefficient of I _d	T _{CID}			0.18		times/°C
Reverse breakdown voltage	V _{(BR)R}	I _R =100μA Ev=0lx	33			V
Junction Capacitance	C _J	V _R =0V f=1MHz		100		pF
		V _R =10V f=1MHz		23		
Photo sensitivity	S _R	650nm		0.39		A/W
		940nm		0.51		
Spectral Application Range	λ _{range}		190		1100	nm
Spectral Response-Peak	λ _p			700		nm
Shunt resistance	R _{sh}	V _R =10mV		0.33		GΩ
Rsh Temperature Coefficient	TC R _{sh}	Ev=100lx , VR=10mV		0.18		%/°C
Angular Resp 50% Resp Pt	θ _{1/2}			±35		Degrees
Noise Equivalent Power	NEP	V _R =10V λ=940nm		2.43×10 ⁻¹⁴		W/Hz ^{1/2}
Specific Detectivity	D*	V _R =10V λ=940nm		4.1×10 ¹³		cm(Hz/W) ^{1/2}

* Ev: Illuminance by CIE standard light source A (tungsten lamp)

Application Circuit:

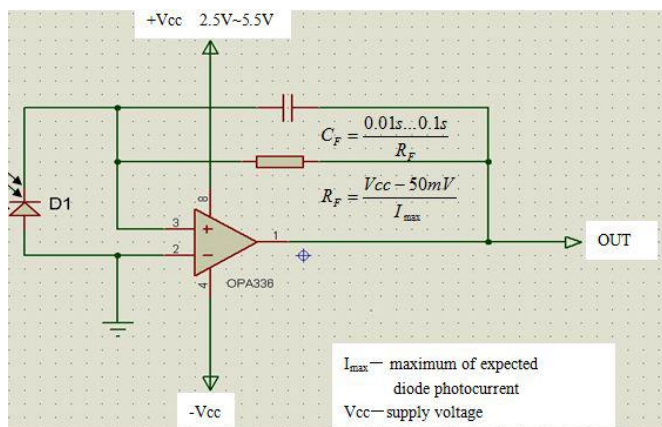

Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject change without notice

OTRON ELECTRONIC TECHNOLOGY CO.LTD


TEL:+86-21-54971821

FAX:+86-21-54971823


EMAL:frank.shuai@e-otron.com

<http://www.e-otron.com>

Dark current vs. reverse voltage

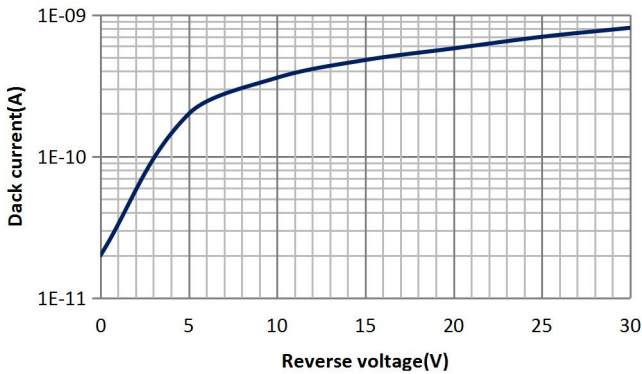


Spectral response

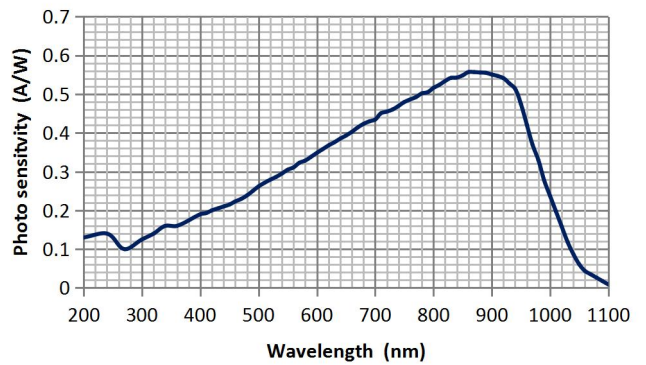


Open circuit Voltage

vs Illumination

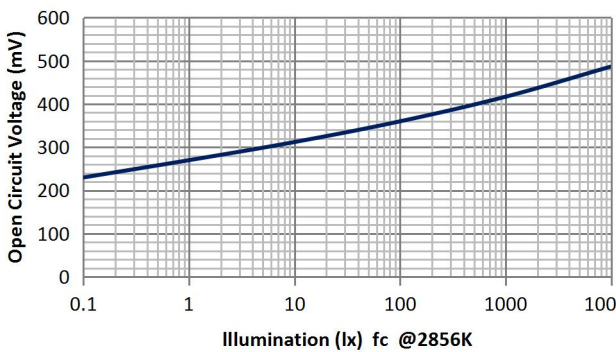


Relative Short Circuit

Current vs. Illumination

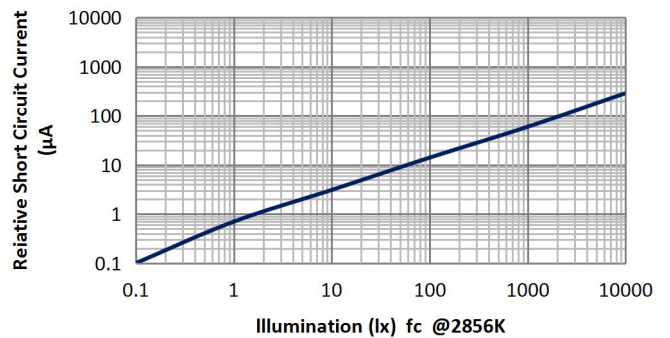


Relative Junction Capacitance

VS. Voltage

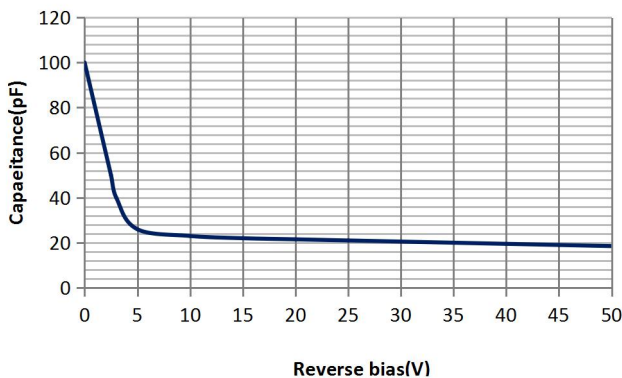

Quantum efficiency

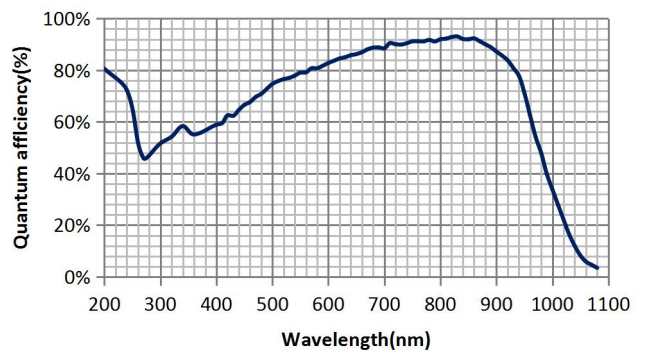

Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject change without notice