InGaAs PIN Photodiode

IGA3000

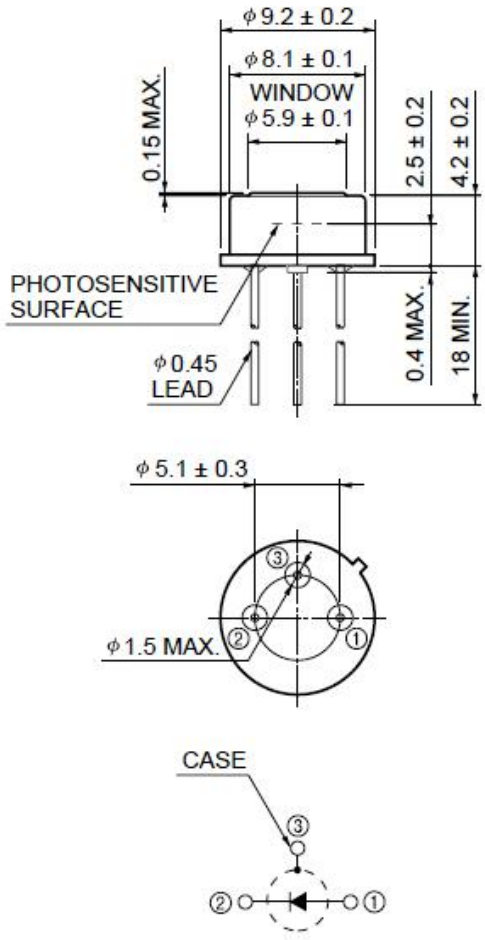

NOTES:

All dimension are in millimeters.

Description

OTRON SENSOR IGA3000 is a type of active area size of 3mm diameter active area IR sensitive detectors which exhibit excellent responsivity from 850nm to 1680nm, allowing high sensitivity to weak signals.

These large active area devices are ideal for use in infrared instrumentation and monitoring applications.

We can also custom type according to customer chip size or Package style enquiry.

Features

* Low voltage operation
* Isolated type are also available
* Large Active Area Diameter
* Spectral Range 850nm to 1700nm

General Ratings

* Type InGaAs Photodiode
* High linearity
* Chip active area: φ 3.0mm
* Low dark current

Applications

* Optical Instrumentation
* NIR Sensing
* *Laser Power Measurement
* Power meters

OTRON ELE CTRONIC TECHNOLOGY CO.LTD
TEL:+86-21-54971821
FAX:+86-21-54971823
EMAL:frank.shuai@e-otron.com
http://www.e-otron.com

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Chip size	s	5.25*5.25				um
Active area	A	ϕ3000				um
Forward current	I_F	10				mA
Reverse current	I_R	10				mA
Dark current	I_D	V_R=0V		80		pA
		V_R=5V		40		nA
Rise time	t_R	V_R=5V;λ=850nm;R_L=50Ω		45		ns
Forward Voltage	V_F	I_F=1mA			0.5	V
Reverse breakdown voltage	$V_{(BR)R}$	I_R=10μA Ev=0lx	35	50		V
Junction Capacitance	C_J	V_R=0V f=1MHz		1900		pF
		V_R=5V f=1MHz		871		pF
Photo sensitivity	S_R	1310nm	0.90	0.95		A/W
		1550nm	0.95	1.10		
Spectral Application Range	λ_{range}		850		1680	nm
Spectral Response-Peak	λ_p			1600		nm
Shunt resistance	R_{sh}	V_R=10mV		0.1		GΩ
Saturation power	L	V_R=0V;λ=1.55μm		1		mW
		V_R=5V;λ=1.55μm		6		
Angular Resp 50% Resp Pt	$\theta_{1/2}$			±55		Degrees
Noise Equivalent Power	NEP	V_R =5V λ=1550nm		5×10^{-14}		$W/Hz^{1/2}$
Specific Detectivity	D*	V_R =5V λ=1550nm		8.8×10^{12}		$cm(Hz/W)^{1/2}$

OTRON ELE CTRONIC TECHNOLOGY CO.LTD
TEL:+86-21-54971821
FAX:+86-21-54971823
EMAL:frank.shuai@e-otron.com
http://www.e-otron.com

■Dark current vs. reverse voltage

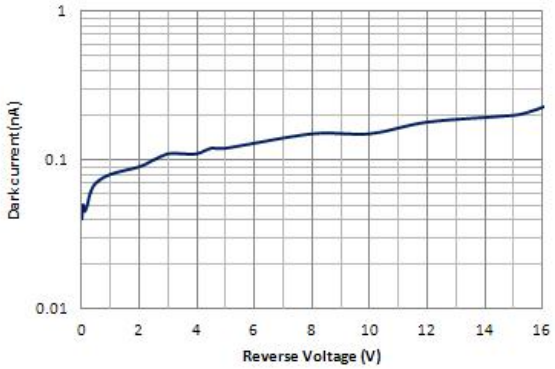

■ Spectral response

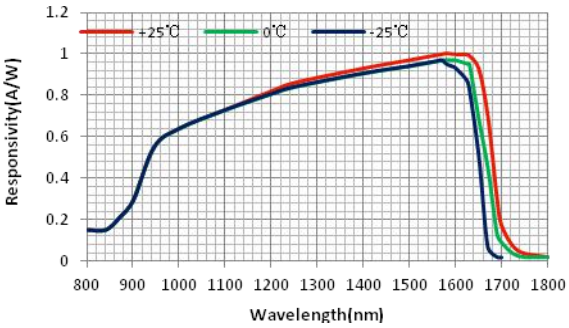

■Relative Junction Capacitance VS. Voltage